



CLOUD LIT & NON-LIT

Fräsch was founded on the belief that creating healthy and beautiful office environments leads to a happier and highly motivated workforce.



CLOUD LIT & NON-LIT

Acoustic Ceiling Fixture

Create a layered aesthetic with a variety of shapes, sizes and colors that provide enhanced acoustic performance in open spaces. CLOUD LIT AND NON-LIT can stand alone or be paired together for a unique installation.

Application Ceiling Suspended

	L	W	H	WEIGHT
*CLOUD - CIRCLE		47"	2.75"	10 lbs.
*CLOUD - SQUARE	47"	47"	2.75"	15 lbs.
**CLOUD - HEX	45"	39"	2"	8 lbs.

*Custom Sizing Available. Lit Option= Add 5lbs.

**HEX CLOUD comes NON-LIT only

Hardware

Default: Sputnik, Jointed Griplock
Aircraft Cable/Threaded Rod, Coupler Nut,
Griplock, Hanger Bolt

Unistrut*: Unistrut, Cone Nut Assembly, Threaded Rod/
Aircraft Cable, Coupler Nut, Griplock

* Available Upon Request

Material Content 9 mm 100% PET (55% recycled content)

Fire Rating Class A per ASTM E-84, based on 9mm white

Acoustics [CLOUD LIT]

Frequency (Hz)	250	500	1K	2K	NRC
NRC	0.74	0.06	1.54	1.77	1.30
Sabins per m ²	11.24	16.21	23.43	27.08	

Test was conducted while product was in its actual installation setting.

All NRC testings assumes one face/one object and does not account for the product thickness.

Environment

Low VOC;
Post-Consumer Recycled Content
100% Recyclable

Installation

CLOUD LIT and NON-LIT come with easy and flexible hanging options. Threaded Rod/Aircraft Cable, Sputnik, Jointed Griplock are included. The ceiling fastener is provided by an installer.

Country of Origin

USA

Warranty

2 Years

CLOUD ROUND LIT

LIGHTING SPECIFICATION

15" Round LED Light




Color	Diffuser/Shielding	Finish	Lamp Included	Light Source	Lumens Range	Options	Size
30K	White	White	Yes	LED	2001 to 3000	Dimming	15"

CLOUD SQUARE LIT

LIGHTING SPECIFICATION

24" LED Edgelit Flat Panel Light


- Ultra thin LED panel light made from high-grade aluminum
- Environmentally-friendly, mercury-free
- IC Rated for dry and damp locations
- CRI >80 standard
- Multiple Kelvin temperatures available (3500K, 4000K, 5000K)
- L70: >50,000 Hours
- Dimming: 0-10V 120-277V
- Power factor >0.90

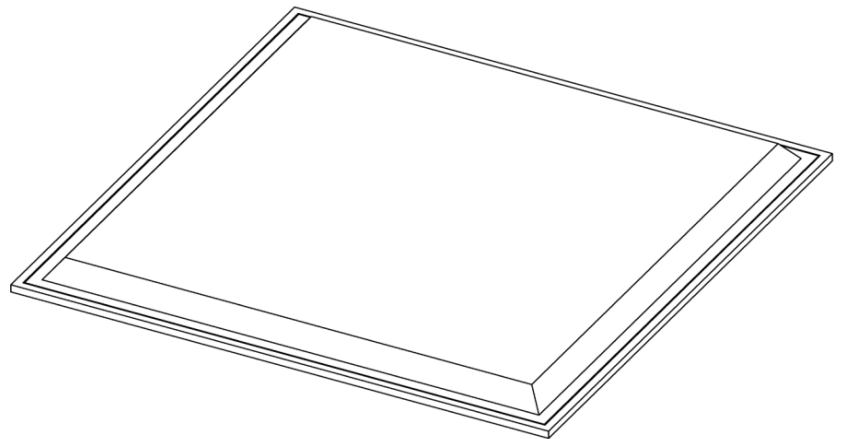

Color	Wattage	Size
40K	40 W	23.625" x 23.625"


CLOUD ROUND NON-LIT

AVAILABLE DIMENSIONS

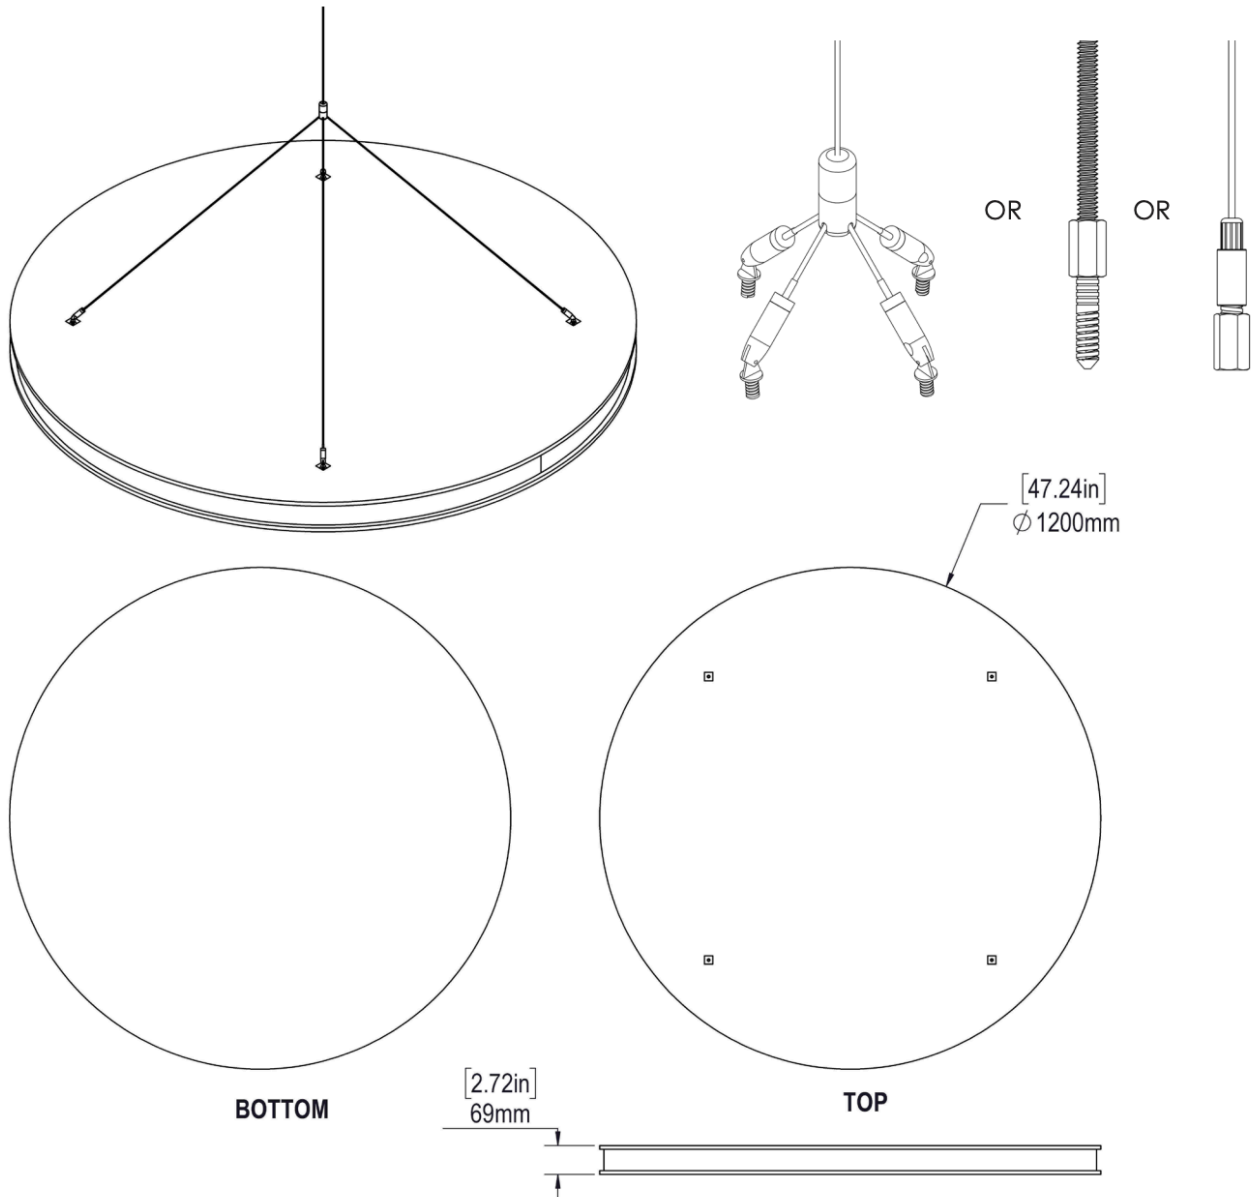




CLOUD ROUND LIT

AVAILABLE DIMENSIONS

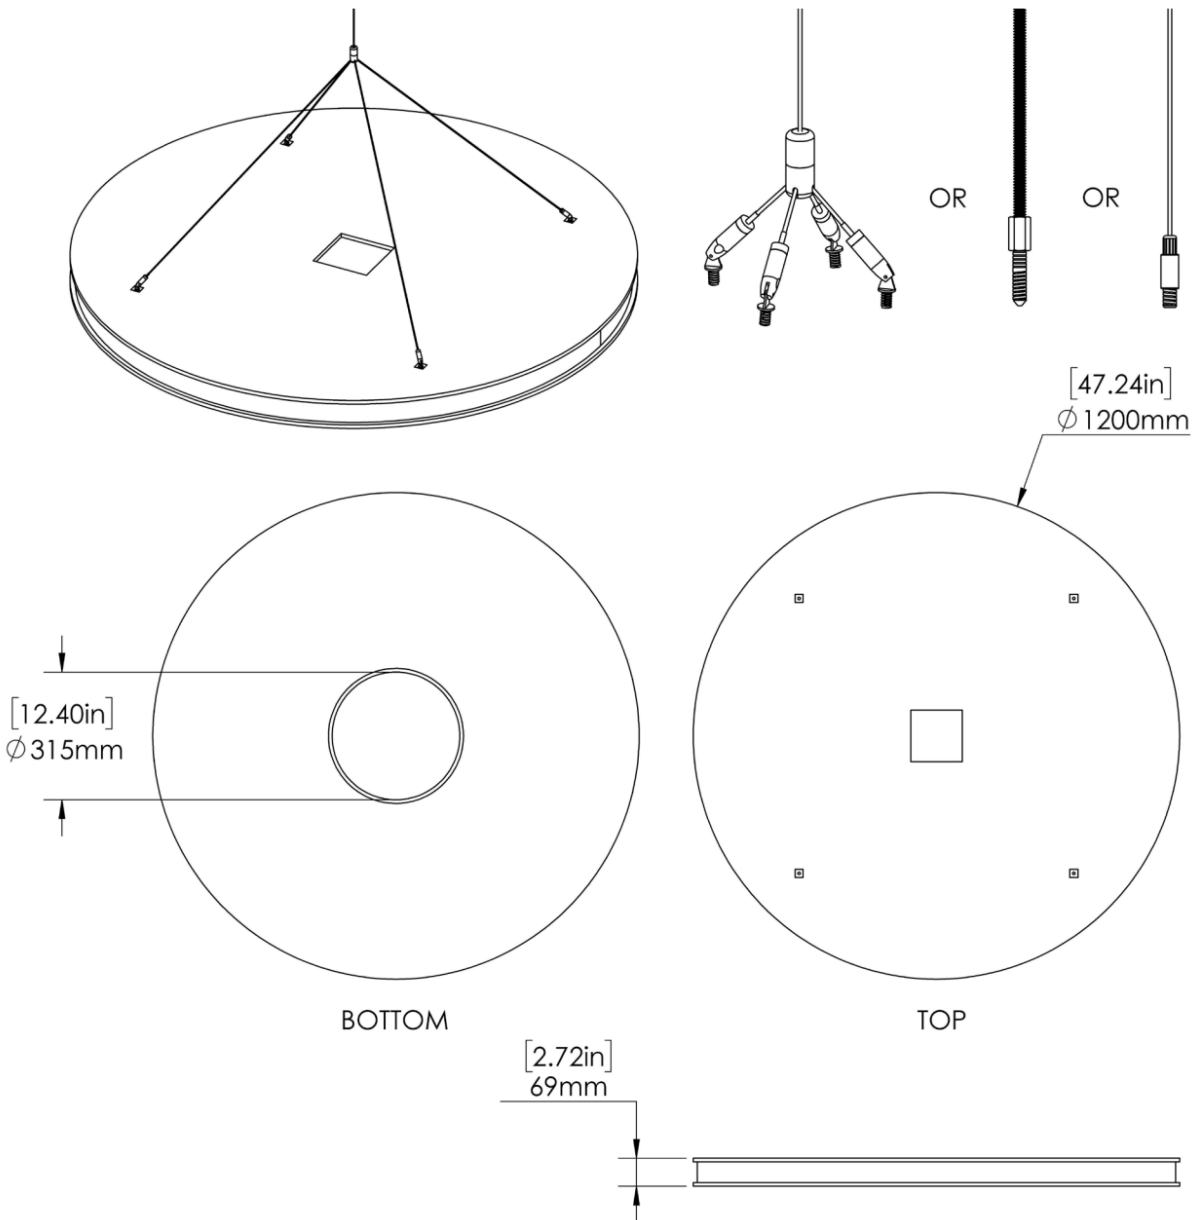


CLOUD HEX NON-LIT

AVAILABLE DIMENSIONS

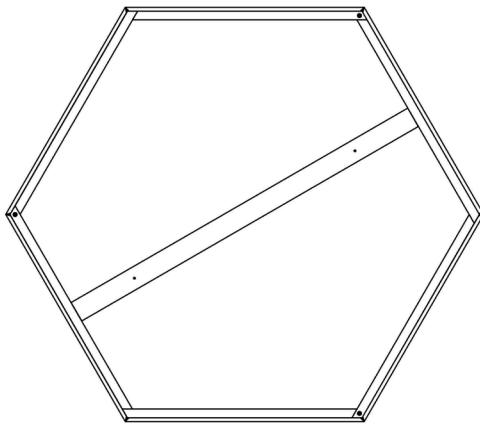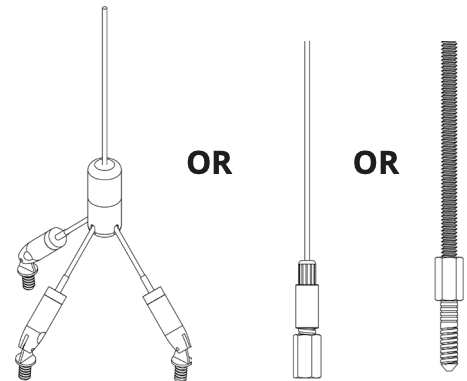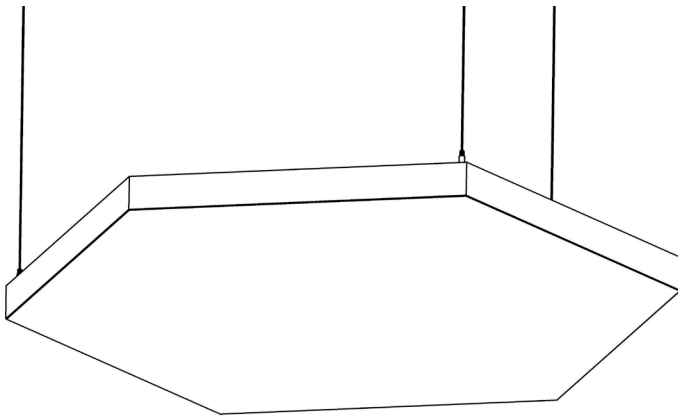

TOP


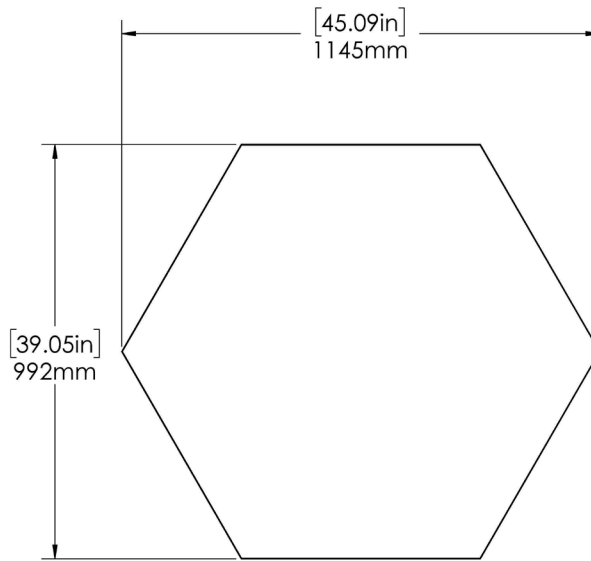


BOTTOM



CLOUD SQUARE NON-LIT

AVAILABLE DIMENSIONS

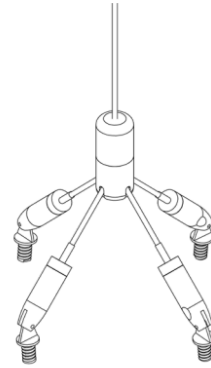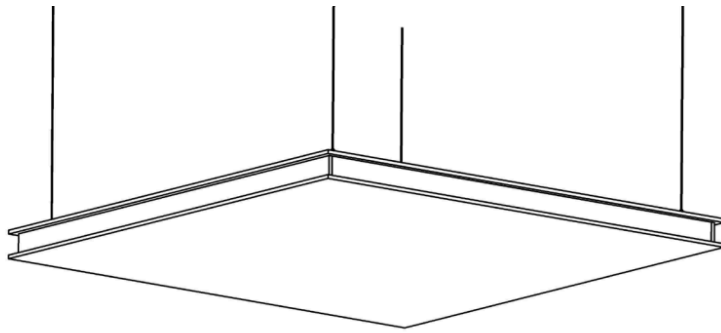

OR



OR



CLOUD SQUARE LIT

AVAILABLE DIMENSIONS

